

**.LED**

**.E27/E40**

# GARDEN LIGHT 2019.V1 ---Wall Recessed Type

International On-line Sales Dept.-Outdoor Light

PH: 0574-62805278  
0574-62805275

FX: 0574-62805277

MB: 13958391970  
(24 Hours service calling)

Email: sales@schtlite.com  
peter\_lamps@163.com

Http://www.schtlite.com , schtlite.en.alibaba.com

Professional supplier in outdoor lighting , both in street & garden lights

**SCHTLITE LIGHT CO., LIMITED**

Changxin Road 39#, Yuyao City 315400, Zhejiang , China

**COMPREHENSIVE VERSION BY SCHTLITE PICTURE 2019**

1.2. WALL RECESSED LIGHT .AL: (P.001 - P.013)

INDEX. A



INDEX. B



INDEX. C



INDEX. D




INDEX. F



INDEX. H



INDEX. L

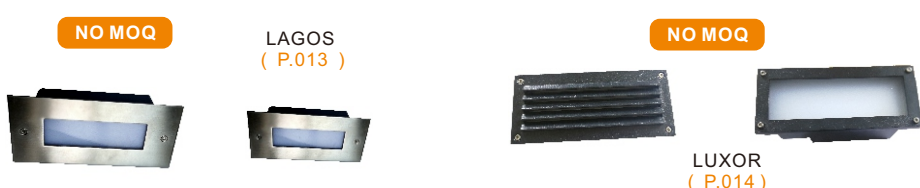

WR

**INDEX** A.LED

1.2. WALL RECESSED LIGHT .AL: (P.001 - P.013)

INDEX. R



INDEX. S



INDEX. T



INDEX. V



# ALDA.LED



### MATERIALS/FINISHES:

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

### LED Color:

- 3000K
- 4000K

### Diffuser Material:

- Frost temper glass
- Frost PC

### Outlook Color:

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

## LED & Drivers:


- LED Driver included
- Application Picture

### LED Type:




- SMD 2835






## FEATURES:

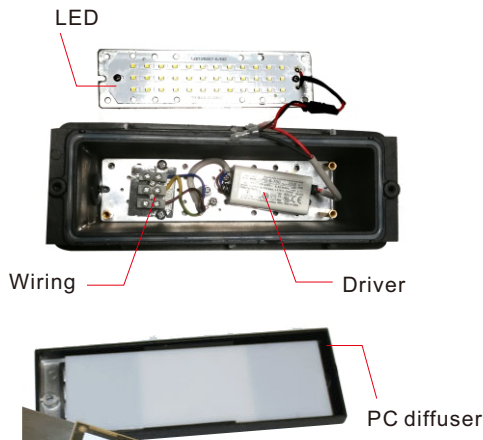




## WALL RECESSED TYPE

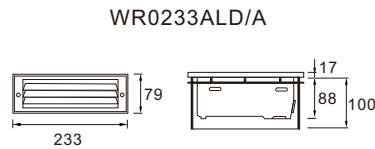

Lumen 95  
Watt 12

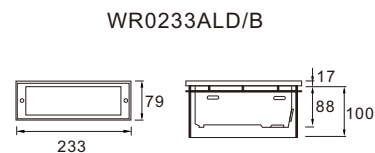

Lumen 48  
Watt 12

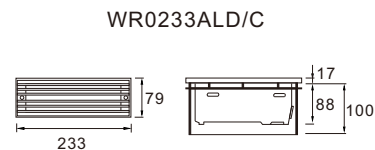

Lumen 48  
Watt 12

- LED Driver included

5

| Item No.    | Watt | LED        | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|-------------|------|------------|----------------------|---------------|------------|-----|----------|-------------|
| WR5233ALD/A | 12W  | SMD 48LEDs | 3000K<br>or<br>4000K | 95lm          | 70.4°      | ≥80 | 100-240V | IP54        |
| WR5233ALD/B |      |            |                      | 408lm         | 76.3°      |     |          |             |
| WR5233ALD/C |      |            |                      | 408lm         | 76.3°      |     |          |             |



# B-BOX



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K


**LED Driver included**

**Diffuser Material:**


Prismatic temper glass

**Outlook Color:**



- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

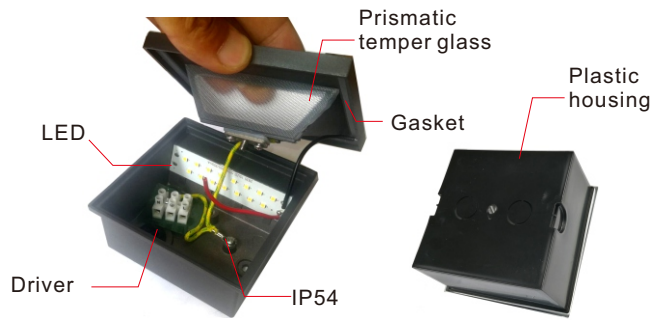

## FEATURES:



WR5105BBX/SQ

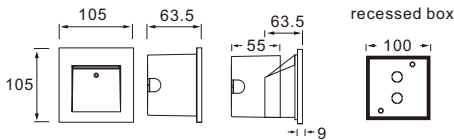

| Item No.     | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR5105BBX/SQ | 5W   | SMD 15LED | 3000K or 4000K | 140lm         | 36°        | ≥80 | 100-240V | IP54        |



# BRIX.WR



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K


**LED Driver included**

**Diffuser Material:**


Prismatic temper glass

**Outlook Color:**




- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

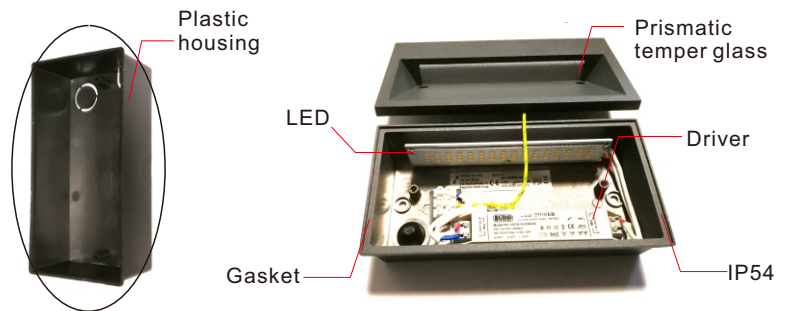

## FEATURES:



WR5204BRX.106

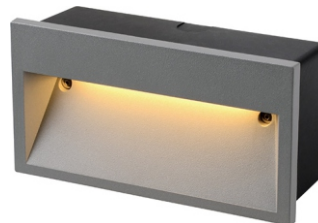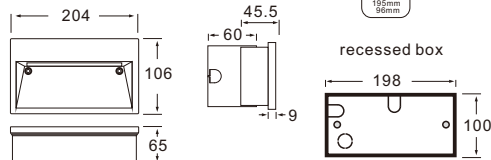

| Item No.      | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|---------------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR5204BBX.106 | 10W  | SMD 48LED | 3000K or 4000K | 377.29 lm     | 78.9°      | ≥80 | 220-240V | IP54        |



# BEDALE

**IP65**

**LED**



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Frost temper glass


**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- 
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


## LED & Drivers:

- **LED Driver included**
- **Application Picture**


- **LED Type:**  
• SMD 2835

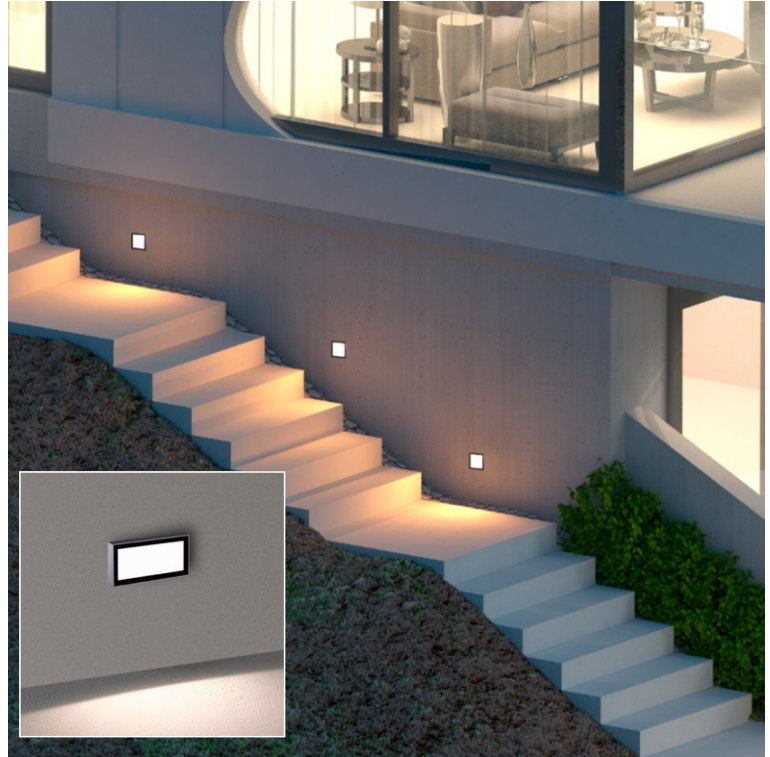



## FEATURES:

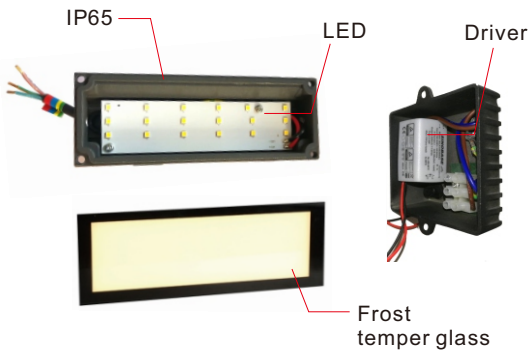


## WALL RECESSED TYPE







WR5140BDL/LQ70



| Item No.       | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR5140BDL/LQ70 | 4W   | SMD40LEDs | 3000K or 4000K | 130lm         | ---°       | ≥80 | 220-240V | IP65        |



WR5090BDL/SQ



| Item No.     | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR5090BDL/SQ | 3.5W | SMD22LEDs | 3000K or 4000K | 120lm         | ---°       | ≥80 | 220-240V | IP65        |
| WR5140BDL/SQ | 6W   | SMD40LEDs | 3000K or 4000K | 270lm         | ---°       | ≥80 | 220-240V | IP65        |

**BOVEY**



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA


**Diffuser Material:**

Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**FEATURES:**

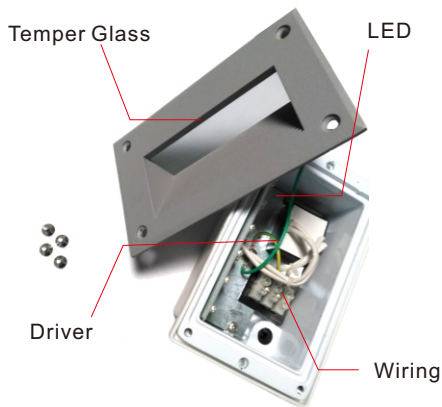

**LED & Drivers:**


- LED Driver included
- Application Picture

**LED Type:**

- SMD 2835





**WALL RECESSED TYPE**



■ LED Driver included


**5**

WR5170BOV/QA


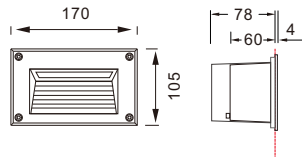


| Item No.     | Watt | LED     | Kelvin            | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|---------|-------------------|---------------|------------|-----|----------|-------------|
| WR5170VSO/QA | 6W   | SMD2835 | or 3000K<br>4000K | 160.9lm       | 46.28°     | 80° | 100-240V | IP54        |

| Item No.        | Luminaire | Length Max. | Socket | Beam Angle | Input     | Safety type | Certification |
|-----------------|-----------|-------------|--------|------------|-----------|-------------|---------------|
| WR0170VSO/Q.E27 | CFL/LED   | L=130mm     | 1*E27  | 31°        | 110V/240V | IP54        |               |
| WR0170VSO/Q.G24 | CFL/LED   | L=150mm     | 1*G24  |            |           |             |               |



WR5170BOV/QB

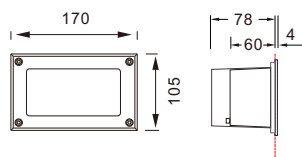

| Item No.     | Watt | LED     | Kelvin            | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|---------|-------------------|---------------|------------|-----|----------|-------------|
| WR5170VSO/QB | 3W   | SMD2835 | or 3000K<br>4000K | 160.9lm       | 122.5°     | 80° | 100-240V | IP54        |

# BOX

IP65



### MATERIALS/FINISHES:

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

LED Color:  
3000K/4000K

- 3000K
- 4000K

### Diffuser Material:

Prismatic temper glass

### Outlook Color:

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- 
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


## LED & Drivers:

- LED Driver included
- Application Picture

LED Type:

- SMD 2835



## FEATURES:

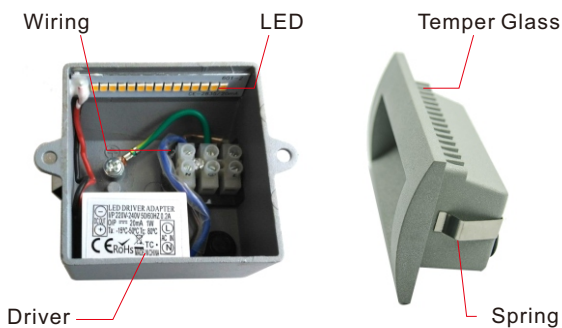



## WALL RECESSED TYPE

LED Driver included



5

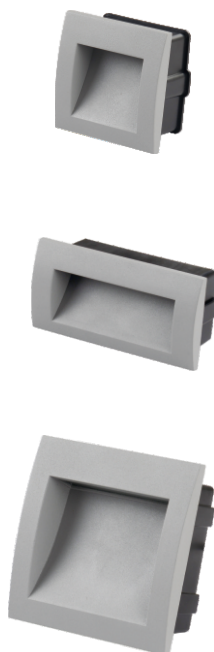



WR5090BOX/SQ

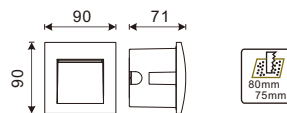

WR5140BOX.70

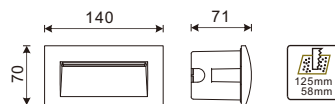

WR5140BOX/SQ



| Item No.         | Watt | LED       | Kelvin   | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|------------------|------|-----------|----------|---------------|------------|-----|----------|-------------|
| WR5090BOX/SQ     | 1W   | SMD15LEDs | 3000K    | 25lm          | 5°         | ≥80 | 220-240V | IP65        |
| WR5160RYD/QA(QB) | 3W   | SMD15LEDs | or 4000K | 90lm          | 5°         |     |          |             |
| WR5160RYD/QA(QB) | 3W   | SMD15LEDs |          | 155lm         | 5°         |     |          |             |



# CATANIA



### MATERIALS/FINISHES:

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

### LED Color:

- 3000K
- 4000K

### Diffuser Material:

Prismatic temper glass


### Outlook Color:

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


## LED & Drivers:

- LED Driver included
- Application Picture

- LED Type:
- SMD 2835

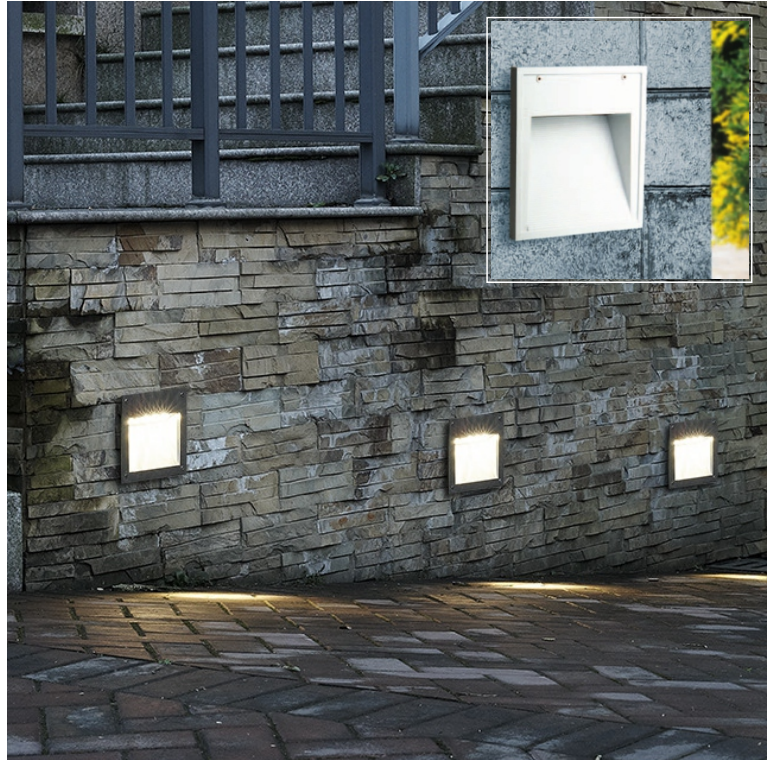


## FEATURES:

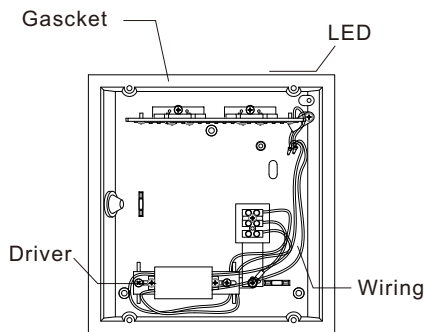


## WALL RECESSED TYPE

- LED Driver included


5




WR5260CAT/Q245

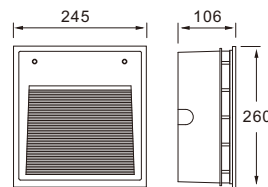


SMD 36LED8W



Recessed Box



SMD 48LED 12W



| Item No.           | Watt | LED       | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------------|------|-----------|--------|---------------|------------|-----|----------|-------------|
| WR5260CAT/Q245.8W  | 8W   | SMD36LEDs | 3000K  | 280lm         | 31°        | ≥80 | 100-240V | IP54        |
| WR5260CAT/Q245.12W | 12W  | SMD48LEDs | 4000K  |               |            |     |          |             |

| Item No.      | Luminaire | Length Max. | Socket | Beam Angle | Input     | Safety type | Certification |
|---------------|-----------|-------------|--------|------------|-----------|-------------|---------------|
| WR0260CAT.E27 | CFL/LED   | L=130mm     | 1*E27  | 31°        | 110V/240V | IP54        |               |
| WR0260CAT.G24 | CFL/LED   | L=150mm     | 1*G24  |            |           |             |               |

**CORSICA**



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

Prismatic temper glass  
Frost PC

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**LED & Drivers:**

■ LED Driver included


■ LED Type:

- SMD 2835




■ Application Picture






**FEATURES:**

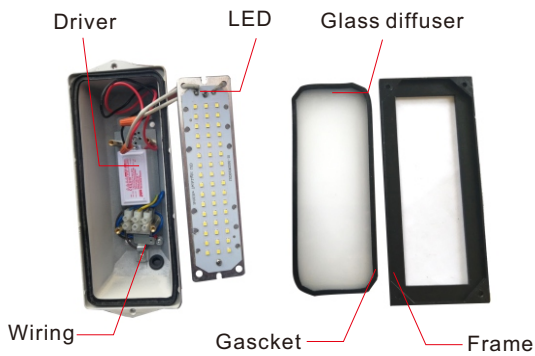





**WALL RECESSED TYPE**



Lumen Watt 25 1



Lumen Watt 25 1



Lumen Watt 155 3

■ LED Driver included **5**

| Item No.    | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|-------------|------|------------|--------|---------------|------------|-----|----------|-------------|
| WR5235CSC/A | 12W  | SMD 48LEDs | 3000K  | 95lm          | 70.4°      | ≥80 | 100-240V | IP54        |
| WR5235CSC/B |      |            | 4000K  | 408lm         | 76.3°      |     |          |             |
| WR5235CSC/C |      |            |        | 408lm         | 76.3°      |     |          |             |

| Item No.      | Luminaire | Length Max. | Socket | Beam Angle | Input     | Safety type | Certification |
|---------------|-----------|-------------|--------|------------|-----------|-------------|---------------|
| WR0235CSC.E27 | CFL/LED   | L=130mm     | 1*E27  | 31°        | 110V/240V | IP65        |               |
| WR0235CSC.G24 | CFL/LED   | L=150mm     | 1*G24  |            |           |             |               |

# DOME

IP65



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Clear PC/Glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K


**Diffuser Material:**

Clear PC/PMMA  
Frost glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**FEATURES:**

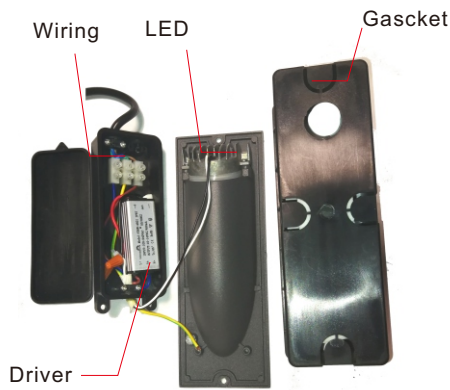

**LED & Drivers:**

- **LED Driver included**
- **Application Picture**

■ **LED Type:**


- SMD 2835





**WALL RECESSED TYPE**

■ **LED Driver included**


**5**



WR5210DME/Q75A






Lumen 180  
Watt 4




WR5210DME/Q75B

WR5210DME/Q75C



Lumen 180  
Watt 4



Lumen 180  
Watt 4

| Item No.       | Watt | LED       | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|-----------|--------|---------------|------------|-----|----------|-------------|
| WR5210DME/Q75A | 10W  | SMD 20LED | 3000K  | 350lm         | 37°        | ≥80 | 100-240V | IP65        |
| WR5210DME/Q75B | 6W   | SMD6LED   | 4000K  | 258.6lm       | 55.45°     |     |          |             |
| WR5210DME/Q75C | 10W  | SMD 20LED |        | 350lm         | 37°        |     |          |             |

# FOK



7



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**LED Driver ex-cluded**



7

**Diffuser Material:**


Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

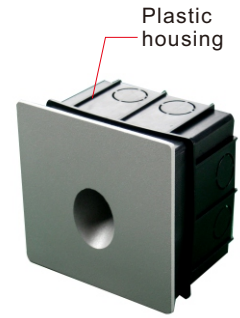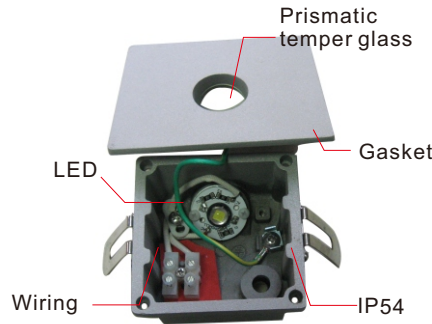



**FEATURES:**



WR7100FOK/SQ



recessed box

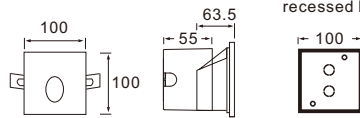

Lumen Watt 140 5

| Item No.     | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR7100FOK/SQ | 5W   | CREE 1LED | 3000K or 4000K | 140lm         | 36°        | ≥80 | 100-240V | IP54        |

# FARM



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**LED Driver included**

**Diffuser Material:**


Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016





**FEATURES:**



WR9233FAM

recessed box

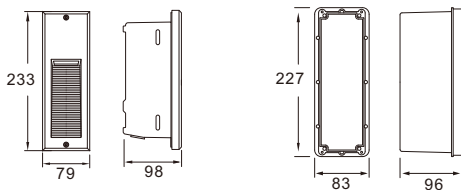

Lumen Watt 140 1\*3

| h(m) | Eavg(lx) | Emax(lx) | D(m) |
|------|----------|----------|------|
| 1    | 2.036    | 2.182    | 0.23 |
| 2    | 0.5091   | 0.5456   | 0.45 |
| 3    | 0.2263   | 0.2425   | 0.68 |
| 4    | 0.1273   | 0.1364   | 0.9  |
| 5    | 0.0815   | 0.0873   | 1.13 |

| Item No.  | Watt | LED       | Kelvin         | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|-----------|------|-----------|----------------|---------------|------------|-----|----------|-------------|
| WR9233FAM | 3W   | CREE 1LED | 3000K or 4000K | 140 lm        | 12.84°     | ≥80 | 100-240V | IP54        |

# FRAME.REC



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC/PMMA
- Silicon rubber gasket
- LED driver certified CE/SAA

**Diffuser Material:**

Frost PC/PMMA

**Outlook Color:**

Stainless steel 304

**LED Color:**

3000K/4000K

- 3000K
- 4000K

## LED & Drivers:

■ LED Driver included


■ Application Picture

■ LED Type:

- SMD 2835




## FEATURES:

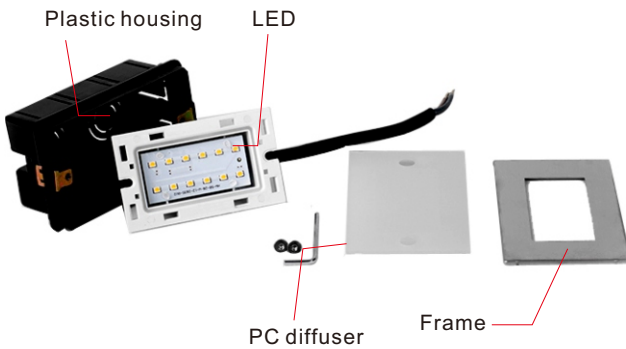

## WALL RECESSED TYPE



■ LED Driver ex-cluded **7**




WR5123FRM/QA



WR5123FRM/QB

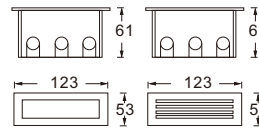


Lumen Watt 42 1.5



Lumen Watt 75 1.5



| Item No.                     | Watt | LED        | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|------------------------------|------|------------|----------------------|---------------|------------|-----|----------|-------------|
| WR5123FRM/QA<br>WR5123FRM/QB | 1.5W | SMD 12LEDs | 3000K<br>or<br>4000K | 42lm<br>75lm  | 135°       | ≥80 | 220-240V | IP65        |




WR5205FRM/QA



WR5205FRM/QB

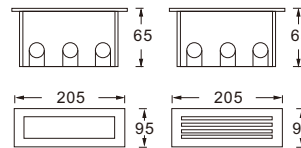

Lumen Watt 136 3.5



Lumen Watt 195 3.5

| Item No.                     | Watt | LED        | Kelvin               | Luminous flux  | Beam Angle | CRI | Input    | Safety type |
|------------------------------|------|------------|----------------------|----------------|------------|-----|----------|-------------|
| WR5205FRM/QA<br>WR5205FRM/QB | 3.5W | SMD 56LEDs | 3000K<br>or<br>4000K | 136lm<br>195lm | 135°       | ≥80 | 220-240V | IP65        |

## FRAME.SQ



### MATERIALS/FINISHES:

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC/PMMA
- Silicon rubber gasket
- LED driver certified CE/SAA

### Diffuser Material:

Frost PC/PMMA

### Outlook Color:

Stainless steel 304

### LED Color:

3000K/4000K

- 3000K
- 4000K

### LED & Drivers:

#### LED Driver included


#### Application Picture

### LED Type:

- SMD 2835



### FEATURES:

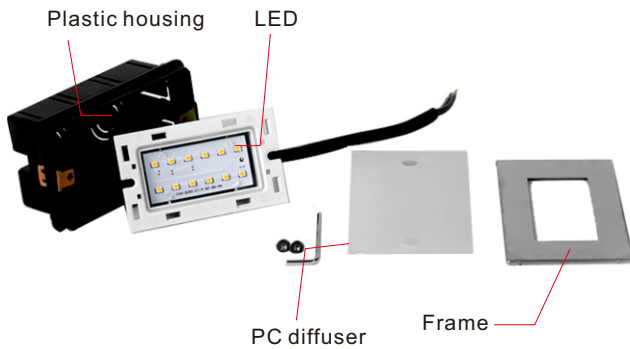



### WALL RECESSED TYPE

#### LED Driver ex-cluded 7




WR5080FRM/SQA

WR5080FRM/SQB



Lumen 42  
Watt 1.5





Lumen 75  
Watt 1.5

| Item No.                       | Watt | LED        | Kelvin            | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------------------------|------|------------|-------------------|---------------|------------|-----|----------|-------------|
| WR5080FRM/SQA<br>WR5080FRM/SQB | 1.5W | SMD 12LEDs | or 3000K<br>4000K | 42lm<br>75lm  | 135°       | ≥80 | 220-240V | IP65        |




WR5135FRM/SQA

WR5135FRM/SQB



Lumen 136  
Watt 3.5



Lumen 195  
Watt 3.5

| Item No.                       | Watt | LED        | Kelvin            | Luminous flux  | Beam Angle | CRI | Input    | Safety type |
|--------------------------------|------|------------|-------------------|----------------|------------|-----|----------|-------------|
| WR5135FRM/SQA<br>WR5135FRM/SQB | 3.5W | SMD 56LEDs | or 3000K<br>4000K | 136lm<br>195lm | 135°       | ≥80 | 220-240V | IP65        |

# HOVA

IP65



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Clear temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K


- 3000K
- 4000K

**Diffuser Material:**  
Clear Temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**FEATURES:**

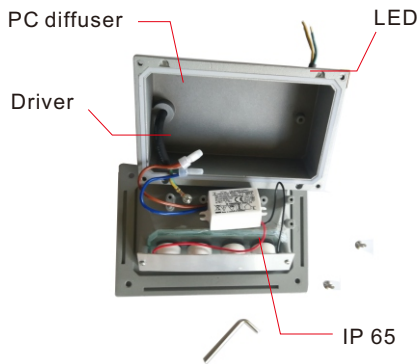


**LED & Drivers:**

- **LED Driver included**
- **Application Picture**


- **LED Type:**  
• CREE 1\*2W




**WALL RECESSED TYPE**




WR9114HOV/SQ

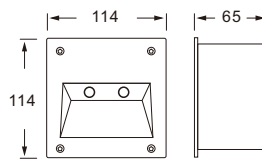


SMD15LED 3W 140lm



WR9170HOV

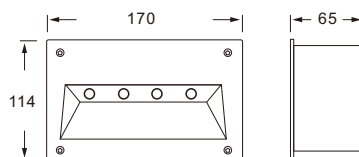

SMD10LED 2W 50lm





| Item No.     | Watt | LED       | Kelvin | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|--------------|------|-----------|--------|---------------|------------|-----|-----------|-------------|
| WR9114HOV/SQ | 2*2W | CREE2LEDs | 3000K  | 169lm         | 29°        | ≥80 | 110V/230V | IP65        |
| WR9170HOV    | 4*2W | CREE4LEDs | 4000K  | 327lm         | 31°        |     |           |             |

**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in PC+Clear temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA






**LED Color:**  
3000K/4000K

- 3000K 
- 4000K 

**Diffuser Material:**

PC +Temper glass diffuser

**Outlook Color:**

- Black 
  - Light Grey 
  - Silver Grey 
  - Dark Grey 
  - White 
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**LED & Drivers:**



- **LED Driver included**
- **Application Picture**

■ **LED Type:**

- SMD 







**FEATURES:**

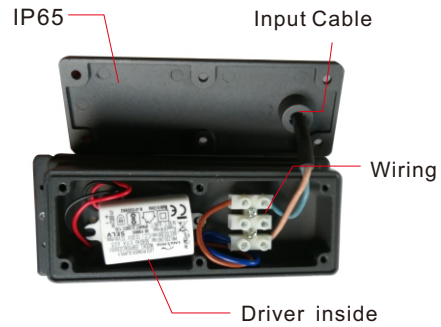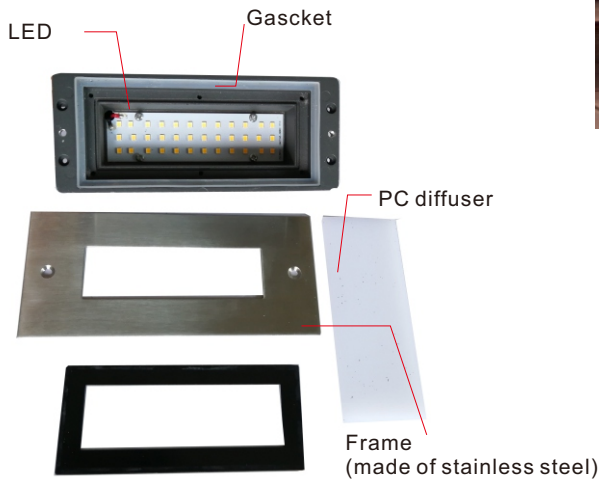





**WALL RECESSED TYPE**

■ **LED Driver included**


**5**

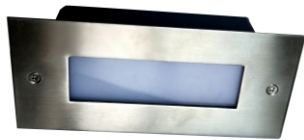

Lumen 400  
Watt 10

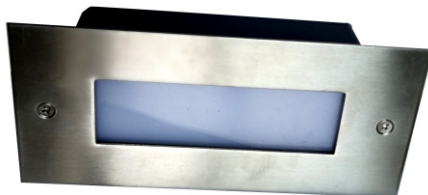

Lumen 400  
Watt 10

| Item No.      | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input     | Safety type   |
|---------------|------|------------|--------|---------------|------------|-----|-----------|---|
| WR5180LGS/Q80 | 6W   | SMD 21LEDs | 3000K  | 360lm         | 120°       | ≥80 | 110V/230V | IP65   |
| WR5210LGS/Q90 | 12W  | SMD 48LEDs | 4000K  | 600lm         |            |     |           |   |



LUXOR

IP65



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in PC/Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

PC/ Frost temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**FEATURES:**



**LED & Drivers:**


- LED Driver included
- Application Picture

- LED Type:  
• SMD 72LEDs





**WALL RECESSED TYPE**


- LED Driver included **5**





WR5190LUX/Q78A

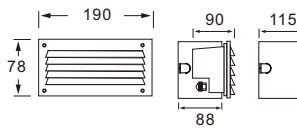

Lumen 280  
Watt 15



WR5190LUX/Q78B

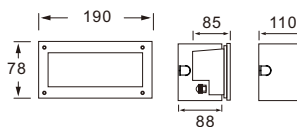

Lumen 780  
Watt 15

| Item No.                         | Watt | LED        | Kelvin               | Luminous flux  | Beam Angle  | CRI | Input    | Safety type |
|----------------------------------|------|------------|----------------------|----------------|-------------|-----|----------|-------------|
| WR5190LUX/Q78A<br>WR5190LUX/Q78B | 15W  | SMD 72LEDs | 3000K<br>or<br>4000K | 280lm<br>780lm | 29°<br>105° | ≥80 | 100-240V | IP65        |

RIGA



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC/PMMA
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Frost PC/PMMA

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

**FEATURES:**




**LED & Drivers:**


- LED Driver included
- Application Picture

**LED Type:**

- SMD 2835

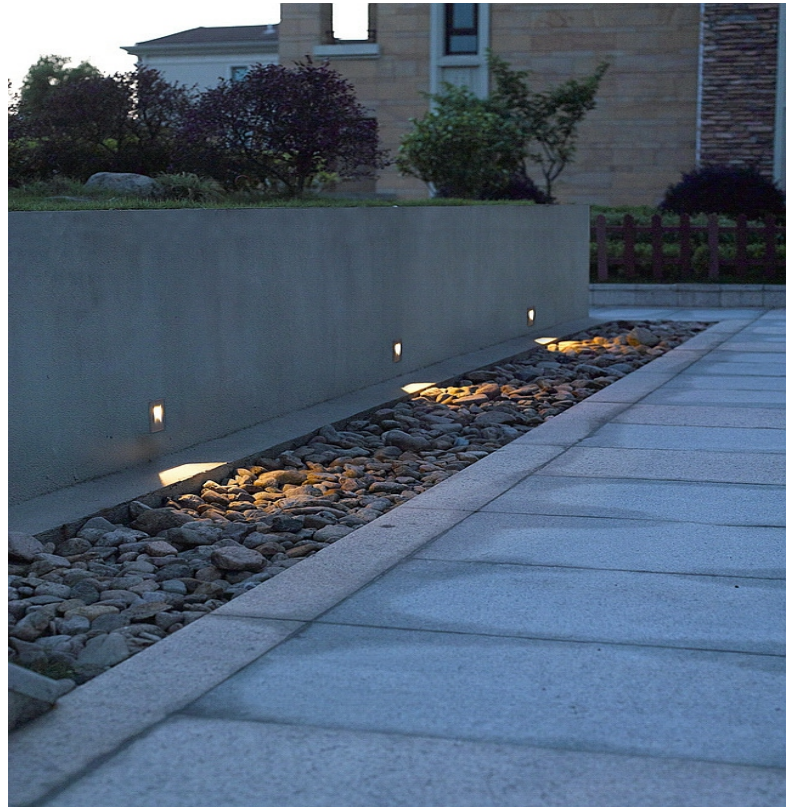



**WALL RECESSED TYPE**





- LED Driver included

5

WR5126RIG/R

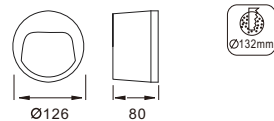

WR5126RIG/SQ

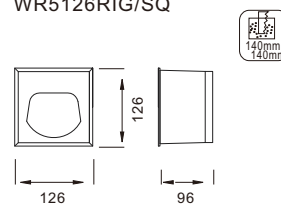

| Item No.                    | Watt | LED        | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|-----------------------------|------|------------|----------------------|---------------|------------|-----|----------|-------------|
| WR9126RIG/R<br>WR9126RIG/SQ | 4W   | CREE 3LEDs | 3000K<br>or<br>4000K | 180lm         | 100°       | ≥80 | 100-240V | IP65        |

# RIYAD-I

IP65



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K


**Diffuser Material:**

Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005  
 RAL7047  
 RAL9006  
 RAL7012  
 RAL9016

## FEATURES:

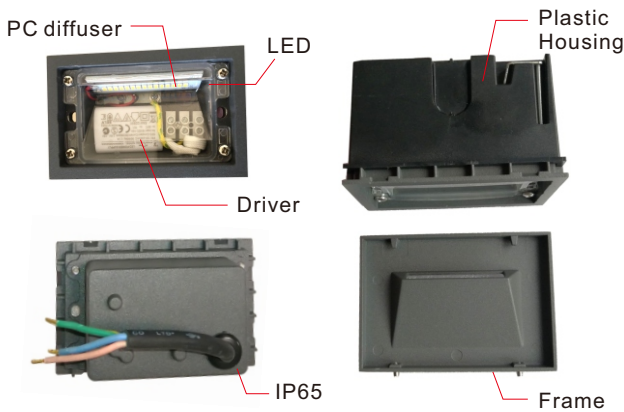

## LED & Drivers:

- **LED Driver included**
- **Application Picture**

■ **LED Type:**


- SMD 2835




## WALL RECESSED TYPE

■ LED Driver included



5




WR5108RYD/Q76





Recessed Box



| Item No.      | Watt | LED       | Kelvin            | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|---------------|------|-----------|-------------------|---------------|------------|-----|----------|-------------|
| WR5108RYD/Q76 | 3W   | SMD15LEDs | or 3000K<br>4000K | 140lm         | ---°       | ≥80 | 220-240V | IP65        |



WR5160RYD/QC



| Item No.     | Watt | LED       | Kelvin            | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------|------|-----------|-------------------|---------------|------------|-----|----------|-------------|
| WR5160RYD/QC | 2W   | SMD10LEDs | or 3000K<br>4000K | 50lm          | ---°       | ≥80 | 200-240V | IP65        |



# RIYAD-II

IP65



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Prismatic temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005  
 RAL7047  
 RAL9006  
 RAL7012  
 RAL9016

## LED & Drivers:


- **LED Driver included**
- **Application Picture**

**LED Type:**


- SMD 2835





## FEATURES:

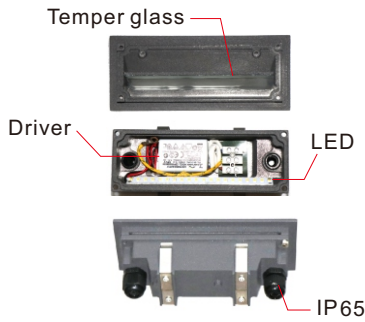



## WALL RECESSED TYPE




WR5160RYD/QA





WR5160RYD/QB





| Item No.                     | Watt | LED       | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|------------------------------|------|-----------|----------------------|---------------|------------|-----|----------|-------------|
| WR5160RYD/QA<br>WR5160RYD/QB | 5W   | SMD20LEDs | 3000K<br>or<br>4000K | 180lm         | 100°       | ≥80 | 220-240V | IP65        |



WR5280RYD/QA

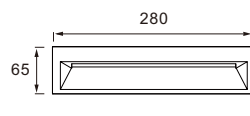

WR5280RYD/QB

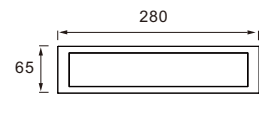

| Item No.                     | Watt | LED       | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|------------------------------|------|-----------|----------------------|---------------|------------|-----|----------|-------------|
| WR5280RYD/QA<br>WR5280RYD/QB | 10W  | SMD30LEDs | 3000K<br>or<br>4000K | 400lm         | 100°       | ≥80 | 220-240V | IP65        |

SEASTAR

IP68



7



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC/PMMA
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

- Clear PC/PMMA

**Outlook Color:**

- Stainless steel

**LED & Drivers:**

**LED Driver included**



**Application Picture**

**LED Type:**


- SMD2835




**FEATURES:**

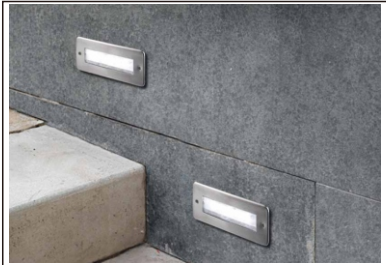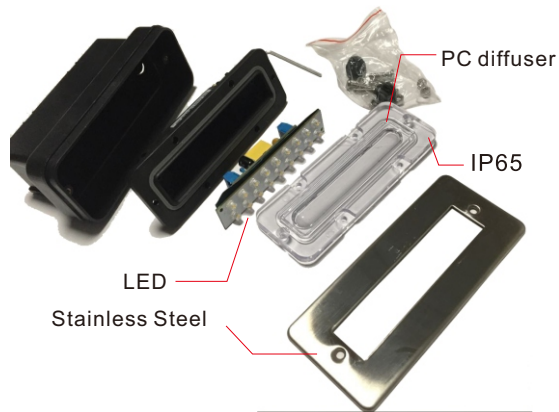


**WALL RECESSED TYPE**




WR7146SST/Q60




SMD18LED 1.5W



WR7196SST/Q70



SMD39LED 2.3W



| Item No.      | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|---------------|------|------------|--------|---------------|------------|-----|-----------|-------------|
| WR7146SST/Q60 | 1.5W | CREE18LEDs | 3000K  | 60lm          | 120°       | ≥80 | 110V/230V | IP68        |
| WR7196SST/Q70 | 2.3W | CREE39LEDs | 4000K  | 130lm         | 120°       | ≥80 | 110V/230V | IP68        |

# SLOT



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Clear temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Clear temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


## LED & Drivers:

- **LED Driver included**
- **Application Picture**

- **LED Type:**  
• D=5mm LED




## FEATURES:

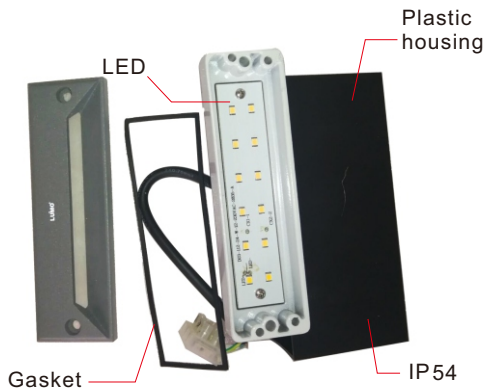


## WALL RECESSED TYPE



- **LED Driver ex-cluded**




WR7145SLT/Q45A




SMD 12LED 1W



WR7145SLT/Q45B

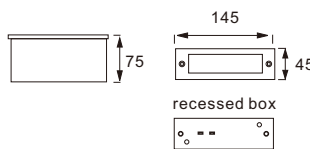

SMD 12LED 1W



| Item No.                         | Watt | LED       | Kelvin            | Luminous flux | Beam Angle  | CRI | Input     | Safety type |
|----------------------------------|------|-----------|-------------------|---------------|-------------|-----|-----------|-------------|
| WR7145SLT/Q45A<br>WR7145SLT/Q45B | 1W   | SMD 12LED | or 3000K<br>4000K | 60lm          | 36°<br>120° | ≥80 | 110V/230V | IP54        |



# SOFIA



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Frost temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


## LED & Drivers:

- LED Driver included
- Application Picture


- LED Type:  
• SMD 2835



## FEATURES:

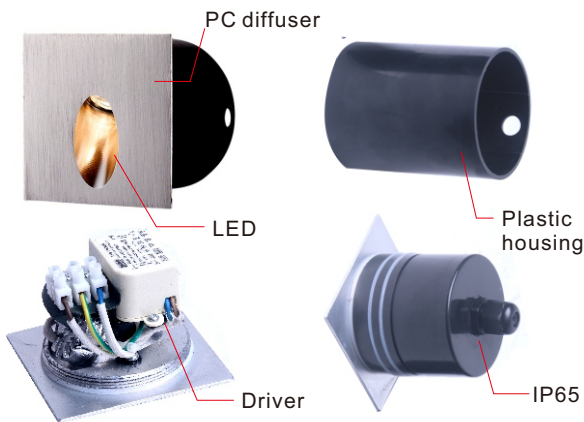

## WALL RECESSED TYPE





WR9080SFI/R0



WR9080SFI/R1


- LED Driver included 5

WR9080SFI/R



Lumen Watt 78 3

| Item No.                     | Watt | LED       | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|------------------------------|------|-----------|----------------------|---------------|------------|-----|----------|-------------|
| WR9080SFI/R0<br>WR9080SFI/R1 | 3W   | CREE 1LED | 3000K<br>or<br>4000K | 78lm          | 30°        | ≥80 | 100-240V | IP65        |





WR9080SFI/SQ0



WR9080SFI/SQ1

WR5080SFI/SQ



Lumen Watt 78 3

| Item No.                       | Watt | LED       | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|--------------------------------|------|-----------|----------------------|---------------|------------|-----|----------|-------------|
| WR9080SFI/SQ0<br>WR9080SFI/SQ1 | 3W   | CREE 1LED | 3000K<br>or<br>4000K | 78lm          | 30°        | ≥80 | 100-240V | IP65        |



# SPRING



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC/Temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

Frost PC/PMMA  
Frost temper glass

**Outlook Color:**

Stainless steel 304


## LED & Drivers:

■ **LED Driver included**


■ **Application Picture**

■ **LED Type:**


- SMD

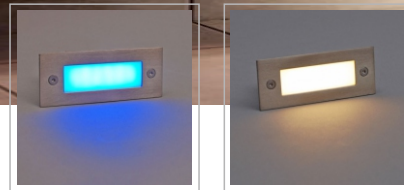

## FEATURES:


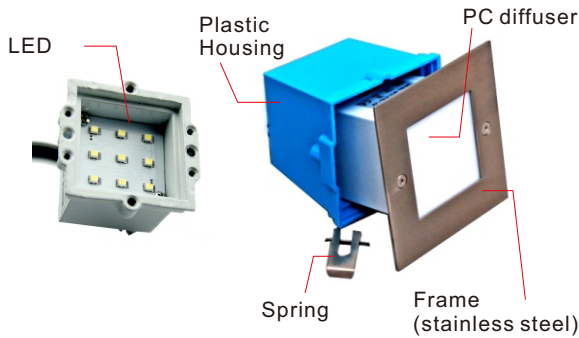


## WALL RECESSED TYPE




WR7070SPR/SQA  
WR7105SPR/SQA

WR7070SPR/SQB  
WR7105SPR/SQB

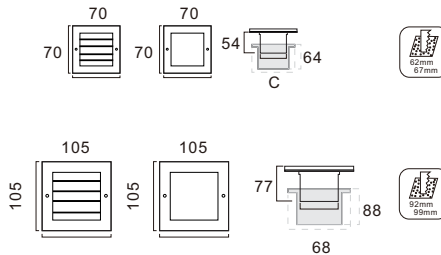

Lumen Watt  
45  
0.8



Lumen Watt  
60  
1.5

■ **LED Driver ex-cluded**



7

| Item No.         | Watt | LED        | Kelvin   | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|------------------|------|------------|----------|---------------|------------|-----|-----------|-------------|
| WR7070SPR/SQA(B) | 0.8W | SMD 9LEDs  | 3000K    | 45lm          | 120°       | ≥80 | 110V/230V | IP54        |
| WR7105SPR/SQA(B) | 1.5W | SMD 16LEDs | or 4000K | 80lm          |            |     |           |             |




WR5111SPR/Q44A  
WR5170SPR/Q68A

WR5111SPR/Q44B  
WR5170SPR/Q68B

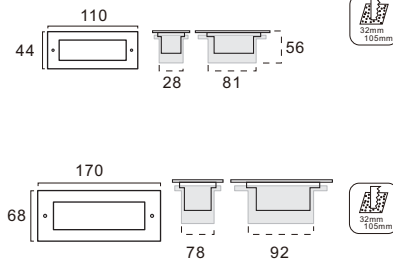

Lumen Watt  
400  
10



Lumen Watt  
400  
10

| Item No.          | Watt | LED        | Kelvin   | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|-------------------|------|------------|----------|---------------|------------|-----|-----------|-------------|
| WR7110SPR/Q44A(B) | 1W   | SMD 12LEDs | 3000K    | 60lm          | 120°       | ≥80 | 110V/230V | IP54        |
| WR7170SPR/Q68A(B) | 1.5W | SMD 16LEDs | or 4000K | 90lm          |            |     |           |             |



# TOKYO

IP65



### MATERIALS/FINISHES:

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Clear PC/Glass
- Silicon rubber gasket
- LED driver certified CE/SAA

### LED Color:

3000K/4000K

- 3000K
- 4000K


### Diffuser Material:

Clear PC/PMMA  
Frost glass

### Outlook Color:

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

## FEATURES:

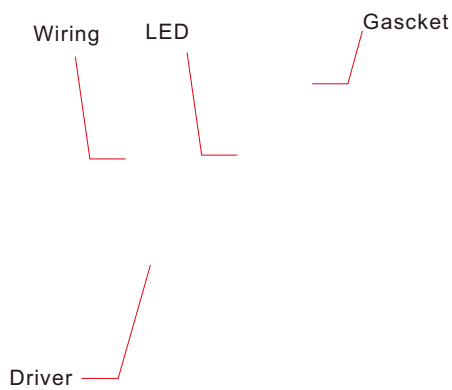

## LED & Drivers:

- LED Driver included
- Application Picture

### LED Type:



- SMD 2835




## WALL RECESSED TYPE

- LED Driver included




5




WR5105TKO/R




Lumen Watt 180 4




WR5090TKO/SQ



Lumen Watt 180 4



WR5140TKO/Q70



Lumen Watt 180 4

| Item No.   | Watt | LED       | Kelvin               | Luminous flux | Beam Angle | CRI | Input                | Safety type |
|--|------|-----------|----------------------|---------------|------------|-----|----------------------|-------------|
| WR5210DME/Q75A<br>WR5210DME/Q75B<br>WR5210DME/Q75C | 3W   | SMD 12LED | 3000K<br>or<br>4000K | 105lm         | 37°        | ≥80 | 100-130V<br>220-240V | IP65        |

# VERSO.LQ



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

Prismatic temper glass

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- 
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016

## LED & Drivers:


- LED Driver included
- Application Picture

**LED Type:**

- SMD 2835



## WALL RECESSED TYPE

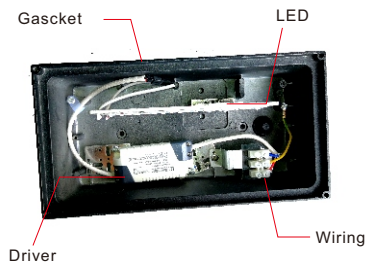


## WALL RECESSED TYPE

- LED Driver included



5



WR5230VSO.195




RECESSED BOX

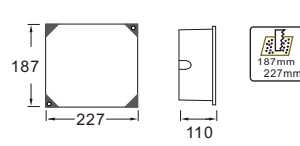



Lumen Watt 198 12



WR5270VSO.142

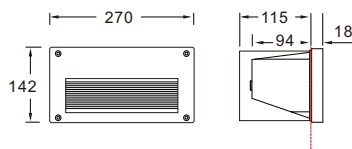

RECESSED BOX



Lumen Watt 198 12

| Item No.                       | Watt | LED     | Kelvin            | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|--------------------------------|------|---------|-------------------|---------------|------------|-----|-----------|-------------|
| WR5270LVS.142<br>WR5230LVS.195 | 12W  | SMD2835 | or 3000K<br>4000K | 194.14lm      | 46.4°      | ≥80 | 110V/230V | IP65        |

| Item No.                       | Luminaire | Length Max. | Socket     | Beam Angle | Input     | Safety type | Certification |
|--------------------------------|-----------|-------------|------------|------------|-----------|-------------|---------------|
| WR0270LVS.142<br>WR0230LVS.195 | CFL/LED   | L=150mm     | 1*E27/G24q | 71°        | 110V/240V | IP65        |               |

# VERSO.SQ



**MATERIALS/FINISHES:**

- Body in extruded aluminum
- Powder coated for outdoor use
- Diffuser in Frost temper glass
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**

Prismatic temper glass

**Outlook Color:**

- Black
- Light Grey
- Silver Grey
- Dark Grey
- White




## LED & Drivers:

- LED Driver included
- Application Picture

- LED Type:  
• SMD 2835




## FEATURES:

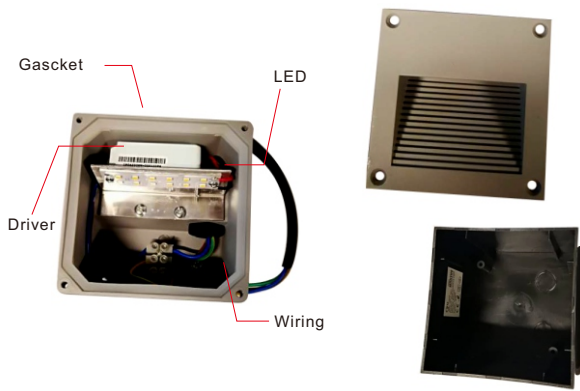


## WALL RECESSED TYPE

- LED Driver included



5




WR5110VSO/SQ




RECESSED BOX

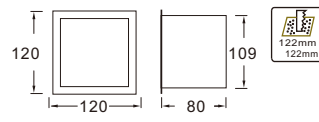



| Item No.     | Watt | LED     | Kelvin            | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|--------------|------|---------|-------------------|---------------|------------|-----|-----------|-------------|
| WR5206VSO/SQ | 6W   | SMD2835 | or 3000K<br>4000K | 160.9lm       | 46.4°      | ≥80 | 110V/230V | IP65        |



WR5206VSO/SQ

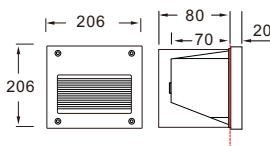

RECESSED BOX

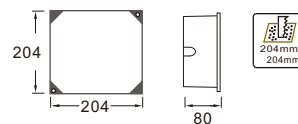

| Item No.     | Watt | LED     | Kelvin            | Luminous flux | Beam Angle | CRI | Input     | Safety type |
|--------------|------|---------|-------------------|---------------|------------|-----|-----------|-------------|
| WR5206VSO/SQ | 12W  | SMD2835 | or 3000K<br>4000K | 194.14lm      | 46.4°      | ≥80 | 110V/230V | IP65        |

| Item No.     | Luminaire | Length Max. | Socket     | Beam Angle | Input     | Safety type | Certification |
|--------------|-----------|-------------|------------|------------|-----------|-------------|---------------|
| WR0206VSO/SQ | CFL/LED   | L=150mm     | 1*E27/G24q | 71°        | 110V/240V | IP65        |               |

# VICTORIA126

IP65



7



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Clear PC diffuser

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005  
 RAL7047  
 RAL9006  
 RAL7012  
 RAL9016


**LED & Drivers:**

- **LED Driver included**
- **Application Picture**

- **LED Type:**  
• SMD 2835





**FEATURES:**


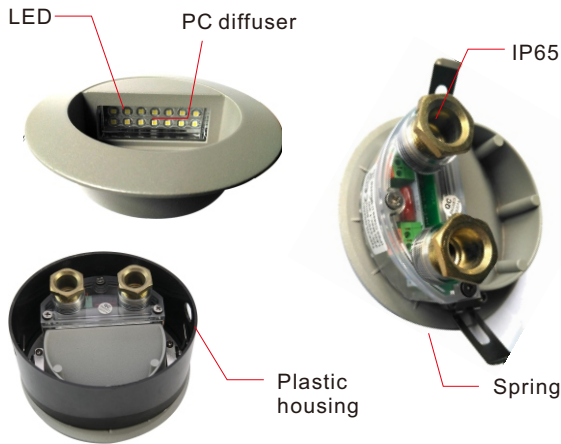


**WALL RECESSED TYPE**


- **LED Driver ex-cluded**



WR5126VTR/R



WR5126VTR/SQ



| Item No.                    | Watt | LED        | Kelvin               | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|-----------------------------|------|------------|----------------------|---------------|------------|-----|----------|-------------|
| WR5126VTR/R<br>WR5126VTR/SQ | 1.2W | SMD 14LEDs | 3000K<br>or<br>4000K | 75lm          | 100°       | ≥80 | 100-240V | IP65        |

# VICTORIA138

IP65



7



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K

- 3000K
- 4000K

**Diffuser Material:**  
Clear PC diffuser

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005   RAL7047   RAL9006   RAL7012   RAL9016


**LED & Drivers:**

- **LED Driver included**
- **Application Picture**

- **LED Type:**  
• SMD 2835





**FEATURES:**

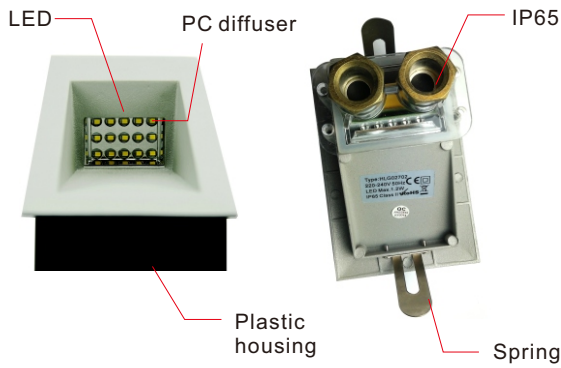

**WALL RECESSED TYPE**

- **LED Driver ex-cluded** 7

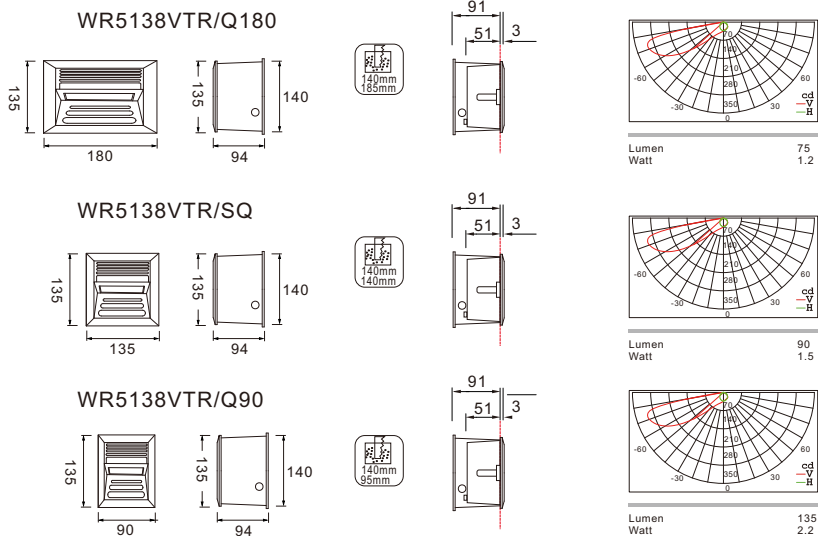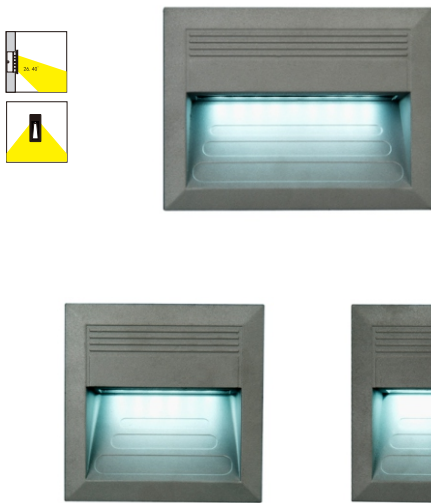

| Item No.       | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|------------|--------|---------------|------------|-----|----------|-------------|
| WR5138VTR/Q90  | 1.2W | SMD 15LEDs | 3000K  | 75lm          | 100°       | ≥80 | 220-240V | IP65        |
| WR5138VTR/SQ   | 1.5W | SMD 18LEDs | 4000K  | 90lm          |            |     |          |             |
| WR5138VTR/Q180 | 2.2W | SMD 27LEDs |        | 135lm         |            |     |          |             |

| Item No.       | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|------------|--------|---------------|------------|-----|----------|-------------|
| WR7138VTR/Q90  | 3W   | SMD 15LEDs | 3000K  | 195lm         | 100°       | ≥80 | 220-240V | IP65        |
| WR7138VTR/SQ   | 6W   | SMD 12LEDs | 4000K  | 390lm         |            |     |          |             |
| WR7138VTR/Q180 | 10W  | SMD 20LEDs |        | 650lm         |            |     |          |             |

# VICTORIA234

IP65



7



**MATERIALS/FINISHES:**

- Body in die cast aluminum
- Powder coated for outdoor use
- Diffuser in Frost PC
- Silicon rubber gasket
- LED driver certified CE/SAA

**LED Color:**  
3000K/4000K


- 3000K
- 4000K

**Diffuser Material:**  
Clear PC diffuser

**Outlook Color:**

- Black
  - Light Grey
  - Silver Grey
  - Dark Grey
  - White
- RAL9005  
 RAL7047  
 RAL9006  
 RAL7012  
 RAL9016

**FEATURES:**

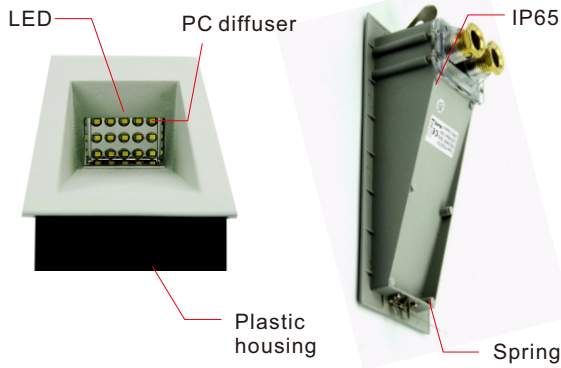


**LED & Drivers:**

- LED Driver included
- Application Picture






- LED Type:  
• SMD 2835



**WALL RECESSED TYPE**



| ITEM NO.       | A   | A1  | B   | C  |
|----------------|-----|-----|-----|----|
| WR5234VTR/Q90  | 230 | 234 | 90  | 94 |
| WR5234VTR/Q140 | 230 | 234 | 140 | 94 |
| WR5234VTR/Q185 | 230 | 234 | 185 | 94 |



| Item No.       | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|------------|--------|---------------|------------|-----|----------|-------------|
| WR5234VTR/Q90  | 1.2W | SMD 15LEDs | 3000K  | 75lm          | 100°       | ≥80 | 220-240V | IP65        |
| WR5234VTR/Q140 | 1.5W | SMD 18LEDs | 4000K  | 90lm          |            |     |          |             |
| WR5234VTR/Q185 | 2.2W | SMD 27LEDs |        | 135lm         |            |     |          |             |

| Item No.       | Watt | LED        | Kelvin | Luminous flux | Beam Angle | CRI | Input    | Safety type |
|----------------|------|------------|--------|---------------|------------|-----|----------|-------------|
| WR7234VTR/Q90  | 3W   | SMD 15LEDs | 3000K  | 195lm         | 100°       | ≥80 | 220-240V | IP65        |
| WR7234VTR/Q140 | 6W   | SMD 12LEDs | 4000K  | 390lm         |            |     |          |             |
| WR7234VTR/Q185 | 10W  | SMD 20LEDs |        | 650lm         |            |     |          |             |